

Data Sheet

UE VANGUARD

WirelessHART® Toxic & Combustible Gas Detector



Supplied by

247able.com

Call us on +44 (0)118 916 9420 | Email info@247able.com

WirelessHART®

TOXIC & COMBUSTIBLE GAS DETECTOR



Registered Address

ABLE Instruments & Controls Ltd
Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire, RG6 4UT. UK.

Reading

Tel: +44 (0)118 9311188 | Email: info@able.co.uk

Aberdeen

Tel: +44 (0)1224 725999 | Email: ab@able.co.uk

Web

able.co.uk

E-commerce

247able.com



CAPABILITY OVERVIEW

Wireless Capability

- *WirelessHART*® communication 7.2
- IEC 62591 compatible
- Integrated HART terminals
- Adjustable update rate

Interoperability

- Seamless integration with existing *WirelessHART* networks and asset management systems

Quick Mount Bracket

- Mounting bracket for pipe or wall mount
- Facilitates easy installation and replacement of unit

Long Lifespan

- 5 years battery life*
- Battery pack is field replaceable in hazardous location areas

Heavy Duty Design

- Class I, Div. 1&2 for hazardous areas
- Explosion-proof & intrinsically safe

FLEXsense™ Sensor

- Automatically configures toxic or combustible gas sensor for readings in ppm or %LEL
- Sensor is field replaceable in hazardous location areas

Easy Calibration and Use

- Configure, calibrate, and test onsite with the touch of a button
- 128x64 pixel graphic display showing gas concentration, network connection, and battery status



*Based on an 8 second update rate. 5 years battery warranty valid upon battery warranty registration.

WirelessHART® is a registered trademark of Field Comm Group. *FLEXsense*™ is a trademark of United Electric Controls Co.

Registered Address

ABLE Instruments & Controls Ltd
Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire, RG6 4UT. UK.

Reading

Tel: +44 (0)118 9311188 | Email: info@able.co.uk

Aberdeen

Tel: +44 (0)1224 725999 | Email: ab@able.co.uk

Web

able.co.uk

E-commerce

247able.com



SPECIFICATIONS

Sensor

	Hydrogen Sulfide (H ₂ S)	Methane (CH ₄)
Storage Temperature:	72°F (22°C) recommended	
Operating Temperature:	-4°F (-20°C) to 122°F (50°C)	
Storage Humidity:	0% to 98% RH recommended	
Storage Pressure:	1.0 ± 0.2 atm recommended	
Storage Life:	1 year in sealed package	3 years in sealed package
Types:	Electrochemical	Nondispersive infrared
Measurement range:	0 to 100 ppm	0 to 100 %LEL
Resolution:	1 ppm	1 %LEL
Accuracy¹:	±10 ppm	±2% LEL or ±5% of indication, whichever is greater
Repeatability²:	±10 ppm	±2% LEL
Response time (T90)³:	60 Seconds	30 Seconds
Stabilization time:	Up to 6 Hours at 72°F (22°C). See installation manual for details	1 Minute

Note: Sensors are interchangeable & self-configurable with the transmitter base. Sensor allows for one-handed sensor installation in hazardous area without declassifying the area

Battery

Batteries:	Battery pack contains two Lithium battery cells
Operating Voltage:	7.2 V
Average Battery Current:	<110uA typical (with H ₂ S sensor) <300uA typical (with CH ₄ sensor)
Life:	5 years based on an 8 second update rate

¹At standard conditions: 68°F (20°C) and 1.0 atm. Accuracy may vary with frequency, accuracy of calibration and environmental conditions (e.g., barometric pressure, temperature and humidity).

²Measured at 50% LEL for CH₄ sensor at 68°F (20°C) and measured at 25 ppm for H₂S sensor at 68°F (20°C).

³Excludes latency due to radio burst rate.

Registered Address

ABLE Instruments & Controls Ltd
Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire, RG6 4UT. UK.

Reading

Tel: +44 (0)118 9311188 | Email: info@able.co.uk

Aberdeen

Tel: +44 (0)1224 725999 | Email: ab@able.co.uk

Web

able.co.uk

E-commerce

247able.com



SPECIFICATIONS CONT.

Base Transmitter

Operating Temperature:	-4°F (-20°C) to 140°F (60°C)
Operating Humidity:	0% to 98% RH recommended
Material:	Aluminum alloy (maximum copper content at 0.25%) with powder polyester paint; 316 stainless steel; nickel-plated brass; tempered glass
Ingress Protection:	Type 4X (enclosure only)
Display:	Viewable area is 2.25"W x 1.25"H (57.2mm x 31.8mm) Graphical LCD display
Display Language:	English
Memory:	Programming and data are protected by a non-volatile EEPROM
Antenna:	2.4 GHz, Hazardous Area Antenna
Mounting:	Supplied mounting bracket for 2" pipe or wall
Weight:	7.84 lbs (Base) 9.61 lbs (Base with Sensor and Battery)

Output and Access

Communication Protocol:	<i>WirelessHART</i> ® HART 7.2; EDDL file available at www.ueonline.com/vanguard	
Process Variables:	Primary Variable (PV):	Hydrogen Sulfide (H ₂ S) concentration in ppm Methane (CH ₄) concentration in %LEL
	Secondary Variable (SV):	Temperature (°C); Not available for Methane sensor
	Tertiary Variable (TV):	Days since calibration (days)
	Quaternary (QV):	Battery voltage (volts)
Programming Access:	HART hand-held communicator or via HART modem connected to HART terminals located in rear battery compartment or via remote access (e.g., asset management software such as Emerson AMS Device Manager)	
Calibration/Bump Test Access:	Via. external button on transmitter base	

Registered Address

ABLE Instruments & Controls Ltd
Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire, RG6 4UT. UK.

Reading

Tel: +44 (0)118 9311188 | Email: info@able.co.uk

Aberdeen

Tel: +44 (0)1224 725999 | Email: ab@able.co.uk

Web

able.co.uk

E-commerce

247able.com



HOW TO ORDER

STEP 1 - CHOOSE TRANSMITTER MODEL

TCD50H1A	Base transmitter; includes enclosure, operating system, radio module, <i>WirelessHART</i> 7.2 communication protocol, 2.4 GHz antenna, and mounting bracket kit; excludes sensor and battery pack
TCD50H1A01	Base transmitter with <i>FLEXsense™</i> Methane (CH ₄) sensor; excludes battery pack
TCD50H1A02	Base transmitter with <i>FLEXsense™</i> Hydrogen Sulfide (H ₂ S) sensor; excludes battery pack

STEP 2 - CHOOSE A BATTERY

6361-807	Battery pack containing two lithium battery cells; 7.2V operating voltage*
----------	--

OPTIONS

REPLACEMENT PARTS

6361-807	Battery pack containing two lithium battery cells; 7.2V operating voltage
62169-45	<i>FLEXsense™</i> Methane (CH ₄) sensor; sensor pack only, excludes base transmitter
62169-46	<i>FLEXsense™</i> Hydrogen Sulfide (H ₂ S) sensor; sensor pack only, excludes base transmitter

ACCESSORIES

62169-50	Gas calibration kit including calibration cup and regulator
6361-811	Mounting bracket kit

*Battery ships separately per US and International Transport Authorities (e.g., IATA). Follow proper disposal regulations for lithium batteries as they apply to your jurisdiction.

Registered Address

ABLE Instruments & Controls Ltd
Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire, RG6 4UT. UK.

Reading

Tel: +44 (0)118 9311188 | Email: info@able.co.uk

Aberdeen

Tel: +44 (0)1224 725999 | Email: ab@able.co.uk

Web


able.co.uk

E-commerce


247able.com



DIMENSIONAL DRAWINGS

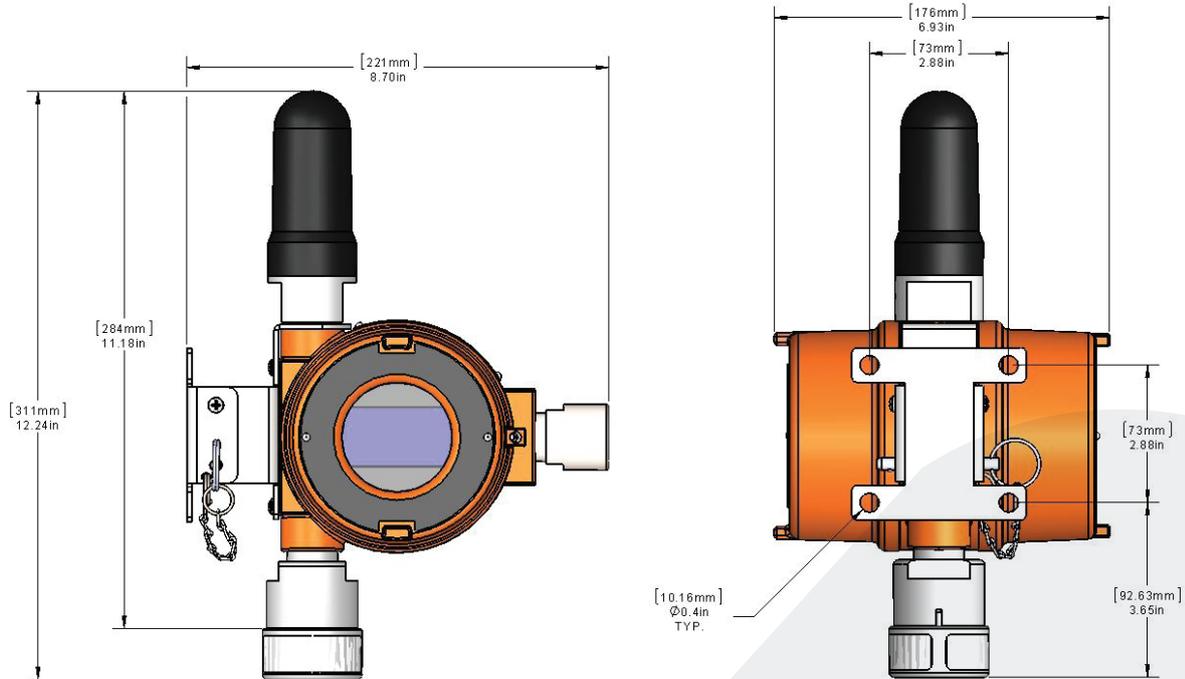

CALIBRATION KIT

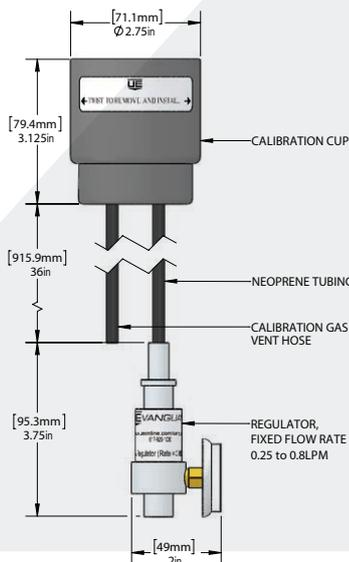

Registered Address

ABLE Instruments & Controls Ltd
Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire, RG6 4UT, UK.

Reading

Tel: +44 (0)118 9311188 | Email: info@able.co.uk

Aberdeen

Tel: +44 (0)1224 725999 | Email: ab@able.co.uk

Web

able.co.uk

E-commerce

247able.com



PRODUCT APPROVALS & RATINGS

Model	N. America	Europe	International
TCD50H1A TCD50H1A01 TCD50H1A02	Class I Div. 1, Groups C & D, T4 USA: Class I, Zone 1, AEx db ia [ia] IIB T4 Gb Enclosure Type 4X** Canada: Class I, Zone 1, Ex db ia [ia] IIB T4 Gb -20°C < Ta < +60°C*	II 2 (2) G Ex db ia [ia] IIB T4 Gb ITS 16 ATEX 18474 -20°C < Tamb < +60°C*	IECEX ETL 16.0016 Ex db ia [ia] IIB T4 Gb -20°C < Tamb < +60°C*

*Ambient operating temperature range may vary with sensor type.

**Enclosure type 4X ratings apply to enclosure only.

UE declarations and third-party issued agency certifications are available for download at: www.ueonline.com/prod_approval.

COMPLIANCE TO STANDARDS

The device has been certified in accordance with the applicable requirements of the standards listed on page 5 of the installation and maintenance manual.

Registered Address

ABLE Instruments & Controls Ltd
Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire, RG6 4UT. UK.

Reading

Tel: +44 (0)118 9311188 | Email: info@able.co.uk

Aberdeen

Tel: +44 (0)1224 725999 | Email: ab@able.co.uk

Web

able.co.uk

E-commerce

247able.com



RECOMMENDED PRACTICES AND WARNINGS

United Electric Controls Company recommends careful consideration of the following factors when installing and operating the UE Vanguard unit. Before installing a unit, the Installation and Maintenance instructions provided with the unit must be read and understood.

- This device is for monitoring and communicating gas concentration levels for data collection or record keeping and does not provide alarm signals.
- Misuse of this device may cause explosion and/or personal injury. These instructions must be thoroughly read and understood prior to installation of the device.
- The end-user is responsible for maintaining the device in full, operational condition.
- Install the device where shock, vibration and temperature fluctuations are minimal. Do not mount in ambient temperatures that exceed the limits on the device labelling.
- The device must be mounted vertically with the sensor pointing downward.
- Avoid dropping the device, as loosening of the threaded flame-proof joints or permanent damage may occur.
- When not in use, the device should be stored in a clean, dry area and within the temperature range listed within the device's environmental specifications.
- The only field replaceable parts are the battery pack and FLEXsense™ sensor. Substitution of other components will invalidate third party issued approvals and certifications, may impair suitability for Class 1, Div 1 location and void any warranties.
- Only battery packs and FLEXsense™ sensors provided by United Electric Controls are compatible with this device.
- New sensors must be calibrated after installation.
- Hydrogen Sulfide (H₂S) is an extremely toxic gas, and exposure may result in loss of consciousness or death.
- Methane (CH₄) is a greenhouse gas and is extremely flammable. Exposure in closed areas may cause explosion, and result in loss of consciousness or death.

LIMITED WARRANTY

Seller warrants that the product hereby purchased is, upon delivery, free from defects in material and workmanship and that any such product which is found to be defective in such workmanship or material will be repaired or replaced by Seller (Ex-works, Factory, Watertown, Massachusetts. INCOTERMS); provided, however, that this warranty applies only to equipment found to be so defective within a period (as defined in the chart below) from the date of manufacture by the Seller.

PRODUCT SERIES/COMPONENTS/REPLACEMENT PARTS	WARRANTY
Electrochemical Sensors	12 months
Infrared Sensors	24 months
Vanguard Base Transmitter	36 months
Battery	60 months*

* 5 year battery warranty valid only with registration at www.ueonline.com/vanguard

Seller shall not be obligated under this warranty for alleged defects which examination discloses are due to tampering, misuse, neglect, improper storage, and in any case where products are disassembled by anyone other than authorized Seller's representatives. EXCEPT FOR THE LIMITED WARRANTY OF REPAIR AND REPLACEMENT STATED ABOVE, SELLER DISCLAIMS ALL WARRANTIES WHATSOEVER WITH RESPECT TO THE PRODUCT, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.

LIMITATION OF SELLER'S LIABILITY

Seller's liability to Buyer for any loss or claim, including liability incurred in connection with (i) breach of any warranty whatsoever, expressed or implied, (ii) a breach of contract, (iii) a negligent act or acts (or negligent failure to act) committed by Seller, or (iv) an act for which strict liability will be inputted to seller, is limited to the "limited warranty" of repair and/or replacement as so stated in our warranty of product. In no event shall the Seller be liable for any special, indirect, consequential or other damages of a like general nature, including, without limitation, loss of profits or production, or loss or expenses of any nature incurred by the buyer or any third party.

UE specifications subject to change without notice.

Registered Address

ABLE Instruments & Controls Ltd
Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire, RG6 4UT. UK.

Reading

Tel: +44 (0)118 9311188 | Email: info@able.co.uk

Aberdeen

Tel: +44 (0)1224 725999 | Email: ab@able.co.uk

Web

able.co.uk

E-commerce

247able.com

