

# HD-1000

## Handheld Oil in Water analyzer



Fluorescence



Spectroscopy

The Advanced Sensors HD-1000 is a portable handheld Oil in Water analyzer with an integrated probe to measure oil directly in water samples. The industrial flexible probe allows for real-time measurements, with spectral analysis which enables oil type identification. These features make the HD-1000 a unique and revolutionary device for the Oil in Water analysis industry.


### Features

- Real-time measurement
- Both direct Oil in Water measurement and solvent extraction measurement
- Laser Induced Fluorescence (LIF)
- Various measurement ranges configurable (0-1ppm, 0-10ppm, 0-100ppm [...] up to 0-3,000ppm)
- Integrated spectral analysis
- Industrial, robust flexible optical probe for ease of measurement in various applications
- Incorporated touch screen with auto orientation
- On screen notepad
- On screen video user manual
- Bluetooth and Wi-Fi communications (4G optional)
- Portable and light weight (0.8kg)
- User interface available in Arabic, French, Norwegian, Portuguese and Spanish; other languages available on request.



### Benefits

- Easy to use
- No solvents or consumables necessary
- Instantaneous measurement: zero sample processing required
- Spectral analysis allows oil recognition and the presence of chemicals
- Automatic software update (optional)
- Measurement data log can be shared via email, Bluetooth or Wi-Fi
- Downloadable oil calibration files from cloud based library

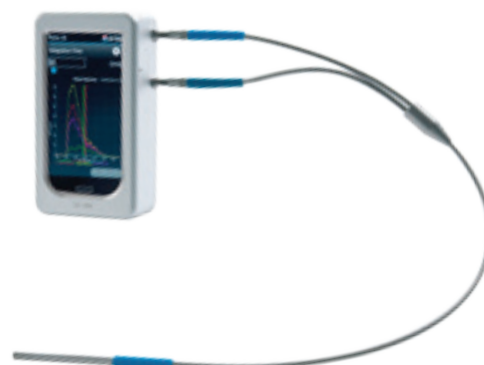

#### Reading Office

Cutbush Park, Danehill, Lower Earley,  
Reading, Berkshire. RG6 4UT. UK.  
Tel: +44 (0)118 9311188  
Email: info@able.co.uk

#### Aberdeen Office

Unit 6 Airside Business Park, Kirkhill Industrial Estate,  
Dyce, Aberdeen. AB21 0GT. UK.  
Tel: +44 (0)1224 725999  
Email: ab@able.co.uk

Internet: www.able.co.uk  
e-procurement: www.247able.com  
Registered in England No: 01851002  
VAT No: GB 417 2481 61



## Technical Specification

<b>Measurement Performance</b>	
Measurement principle	Laser Induced Fluorescence (LIF)
Range	0-3,000ppm
Accuracy	±1% of measurement range
Repeatability	>99%
Response time	<1 second, continuous results
<b>Operating conditions</b>	
Process temperature	0°C to 100°C
Operational ambient temperature	-5°C to +50°C
<b>Spectral Analysis Specification</b>	
Emission wavelength range	400-1,100nm
Resolution	0.5nm
<b>Utilities</b>	
Power	Rechargeable battery (3,000 mAh) 5Vdc (Charging device required: input 100-240VAC, Output 2A)
<b>Material</b>	
Enclosure material	Aluminium
<b>Weight and Dimensions</b>	
Weight	0.8kg
Dimensions	85W x 152D x 52H mm
Flexible probe length	0.7m (additional length optional)
<b>Communications</b>	
Wireless (Wi-Fi)	Standard
Bluetooth	Standard
Internal data storage	9GB (expandable to 41GB)
Security	Password protection

### Reading Office

Cutbush Park, Danehill, Lower Earley,  
Reading, Berkshire. RG6 4UT. UK.  
Tel: +44 (0)118 9311188  
Email: info@able.co.uk

### Aberdeen Office

Unit 6 Airside Business Park, Kirkhill Industrial Estate,  
Dyce, Aberdeen. AB21 0GT. UK.  
Tel: +44 (0)1224 725999  
Email: ab@able.co.uk

Internet: www.able.co.uk  
e-procurement: www.247able.com  
Registered in England No: 01851002  
VAT No: GB 417 2481 61

