


Flanged Models

Differential Pressure Flow Sensors


The Most Accurate and Reliable Technology for Measuring Gas, Liquid and Steam...

Developed from aerospace technology, the Verabar® averaging pitot flow sensor provides unsurpassed accuracy and reliability. With its solid, one-piece construction and bullet shape, the Verabar makes flow measurement leak proof and precise.

The unique sensor shape reduces drag and flow induced vibration. The location of the low-pressure ports eliminates the potential for clogging and improves signal stability.

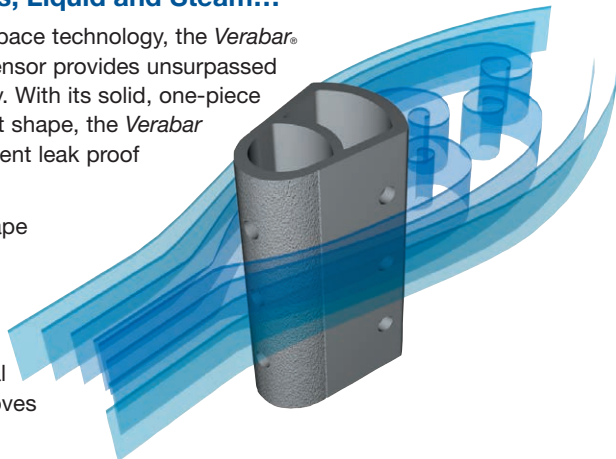

V550 Spring Lock Flanged Connection with Packing Gland

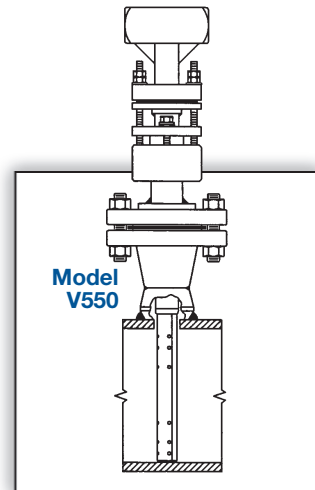

V550 Flanged Spring Lock	
Pipe Connection	Flanged
Mounting Type	Spring loaded sensor mounted on flange with packing gland
Features and Benefits	<ul style="list-style-type: none"> • Blow-out and leak proof design • Preloads sensor to opposite wall • Four times stronger than conventional mountings • Eliminates need for opposite end support • Compensates for changes in pipe diameter due to pressure, temperature or mechanical force • Can mount to existing flanges
Applications	<ul style="list-style-type: none"> • Air • Natural gas • Water (raw, cooling, feedwater) • Hydrocarbon liquids and gases • High velocity fluids • Hazardous fluids • Steam
Special Designs – Consult Factory	<ul style="list-style-type: none"> • Custom mounting, lengths, materials, instrument connections, etc. • Short straight run


Temperature Pressure Limits (ANSI Class)*
150#
275 psig @ 100°F (19 Bars @ 38°C)
80 psig @ 800°F (5.5 Bars @ 426°C)
300#
720 psig @ 100°F (49.6 Bars @ 38°C)
410 psig @ 800°F (28.3 Bars @ 426°C)
600#
1440 psig @ 100°F (99.3 Bars @ 38°C)
825 psig @ 800°F (56.9 Bars @ 426°C)

Model Specifications	V550		
	05	10	15
Sensor Code	05	10	15
Sensor Diameter	7/16" (11mm)	7/8" (22mm)	1-3/8" (35mm)
Accuracy	±1% of flow rate; ±0.5% if calibrated		
ANSI Class*	150#, 300# and 600#		
Pipe Size	2" - 6" (50mm - 150mm)	6" - 42" (150mm - 1050mm)	12" - 60" (300mm - 1500mm)
Instrument Connection	1/2" NPT	1/2" NPT or Direct Mount	
Components Furnished	Spring lock mounting assembly, weld coupling, weldneck flange, gasket, studs & nuts		
Flange Size	1"	1-1/2"	2"

* DIN and JIS flanges available. Consult factory.


Flanged Models

V550 Spring Lock

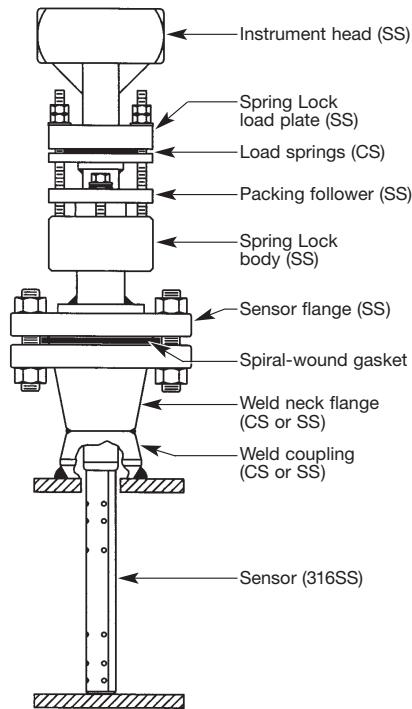


Furnish the following information:

1. Enter Pipe Dimensions or Duct Dimensions

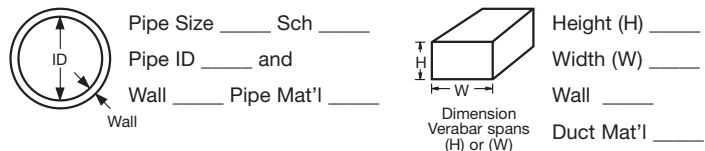

2. Pipe or Duct Orientation



3. Enter Flow Conditions

Fluid Name:		Maximum	Normal	Minimum	Units
Flow Rate					
All Fluids	Temperature @ Flow				
	Pressure @ Flow				
Gas	Specific Gravity, or Molecular Weight				
Liquid	Specific Gravity				
Steam	Veracalc Program can calculate Density from Temperature and Pressure				

4. Select Model from Page 3


Use the Ordering Information table on Page 3 to determine your model number.

5. Flow Calculation



All Verabar applications require a flow calculation to verify the DP, pressure and temperature limits, structural limits and to size the transmitter. The Veracalc PC Program is for use by representatives and end users. It is easy to operate and **includes steam tables**.

Model V550

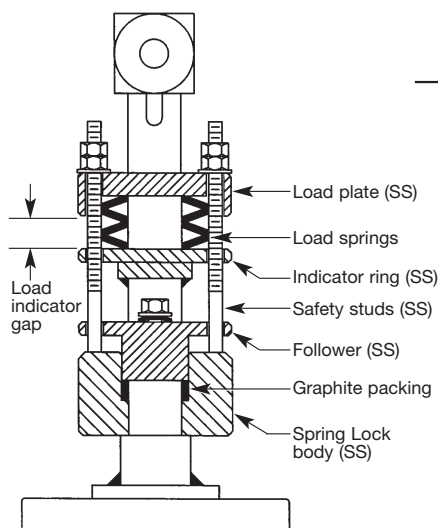

Spring Lock Mount

- Design ensures the sensor is sealed, locked and pre-loaded to the opposite wall, regardless of changes in pipe diameter due to pressure, temperature or mechanical vibrations.
- Leak-proof...compensates for differential in packing and body growth rates due to increased temperatures.
- Increases sensor strength (eliminates the need for an opposite wall support). A locked, pre-loaded sensor is four times stronger than a non pre-loaded, cantilevered sensor.
- Spring Lock is engineered with three standard spring configurations equivalent to ANSI class 150#, 300# and 600# ratings.
- By loading the sensor and packing independently, the sensor can move axially to maintain a precise load on the pipe wall.

Ordering Information

Model	Flanged						
V550	Spring Lock						
Pipe Size and Schedule or Exact ID and Wall Thickness							
Code	Sensor Pipe Size Range						
05	2" to 6" (50mm to 150mm)						
10	6" to 42" (150mm to 1050mm)						
15	12" to 60" (300mm to 1500mm)						
Code	Pipe Orientation						
H	Horizontal						
V	Vertical						
Instrument Connections (Select Remote or Direct Mount) (Transmitter sold separately)							
Remote Mount Transmitter (1/2" NPT)				Direct Mount Transmitter (Flanged 450°F/232°C Max.)†			
Parallel	Regular	RTD* Explsn. Proof	Valve Integral	Transmount	Mass Transmount* Integral RTD	Remote RTD	Manifold Integral
P	R	D	T	F	G	E	M
Instrument Valves (Opt.)				Manifolds (Optional)			
Remote Mount				Direct Mount			
Needle	Gate	3-Valve		5-Valve			
1/2" NPT	1/2" NPT	Soft Seat	Hard Seat	Soft Seat	Hard Seat		
C2NC (CS) C2NS (SS)	C2GC (CS) C2GS (SS)	F3SC (CS) F3SS (SS)	F3HC (CS) F3HS (SS)	F5SC (CS) F5SS (SS)	F5HC (CS) F5HS (SS)		
Mounting Assembly – Select Material & Rating (Includes SS sensor flange, WN flange, weld coupling, spiral-wound gasket, studs & nuts)							
Sensor (Flange Size)			Mating Flange Material & ANSI Class				
05 (1")	10 (1-1/2")	15 (2")					
Code							
F415C F415S	F615C F615S	F815C F815S	CS	150#			
			SS	150#			
F430C F430S	F630C F630S	F830C F830S	CS	300#			
			SS	300#			
F460C F460S	F660C F660S	F860C F860S	CS	600#			
			SS	600#			
Typical Model Number							
V550	8"sch40	10	H	R	C2NC	F615C	

* For high pressure (>500psig) or high temperature (>500°F), remote mount RTD in a thermowell is preferred.
† Assuming adequate heat dissipation for transmitter.

INSTRUMENT HEAD (SS)
(SEE OPTIONS ABOVE)

VISUAL LOAD INDICATION

LOAD PLATE (SS)

LOAD SPRINGS (CS)

PACKING FOLLOWER (SS)

SAFETY SPRING LOCK PACKING BODY (SS) (GRAPHITE PACKING)

SENSOR FLANGE (SS)

WELD NECK FLANGE (CS) (SS-OPTIONAL) (SUPPLIED WITH SENSOR)

SPRIGAL-WOUND GASKET

FLANGE FACE TO OD OF PIPE

WALL

D (DRILLED HOLE DIA.)

SECTION A-A

WELD COUPLING (CS) (SS-OPTIONAL) (SUPPLIED WITH SENSOR)

DIRECTION OF FLOW

SENSOR (316SS)

ITEM CODE	DESCRIPTION	ITEM CODE	DESCRIPTION
P	PARALLEL MOUNT	F	TRANSMOUNT
R	REGULAR	G	MASS TRANSMOUNT
D	RTD	E	RMT RTD
T	VALVE	M	MANIFOLD
S	VALVE		INTEGRAL
C2NG (CS)	NEEDLE		3-VALVES
C2NS (SS)	1/2" NPT		SOFT SEAT F3SC (SS)
C2GC (CS)	GATE		HARD SEAT F3HC (CS)
C2GS (SS)	1/2" NPT		SOFT SEAT F5SC (SS)
			HARD SEAT F5HC (CS)

ITEM	SENSOR -05	SENSOR -10	SENSOR -15
FLANGE & COUPLING SIZE	7/16" (11mm)	7/8" (22mm)	1-3/8" (35mm)
FLANGE & COUPLING SIZE	1"	1-1/2"	2"
DIM D' DRILLED HOLE DIA.	1/2" (13mm)	1" (26mm)	1-1/2" (38mm)
DIM H* ANSI CLASS 150#	11.4" (288mm)	14.5" (368mm)	16.8" (427mm)
DIM H* ANSI CLASS 300#	12.0" (305mm)	15.1" (383mm)	17.4" (441mm)
DIM H* ANSI CLASS 600#	12.5" (317mm)	15.7" (399mm)	18.1" (460mm)
DIM X* ANSI CLASS 150#	3.31" (84mm)	3.81" (97mm)	4.06" (103mm)
DIM X* ANSI CLASS 300#	3.56" (90mm)	4.06" (103mm)	4.31" (110mm)
DIM X* ANSI CLASS 600#	3.81" (97mm)	4.38" (111mm)	4.68" (119mm)

* H' & X' DIMENSIONS ARE APPROXIMATE (FOR SIZING PURPOSES ONLY)

CUSTOMER: _____

PROJECT: _____

ORDER NO: _____

TAG NO: _____

PIPE SIZE & SCHEDULE: _____

CATALOG NO: _____

SERIAL NO: _____

CERTIFIED BY: _____ DATE: _____

VERIS, inc.

VERABAR MODEL: V550

SPRING LOCK FLANGED

6315 MONARCH PARK PLACE
NIMOT, CO 80503
PHONE: 303-652-8550
FAX: 303-652-8552

DATE	09/20/01	DWG NO.	SUB-3943
SCALE	NTS	REV A	PAGE 1 OF 1