

GE
Measurement & Control

RHM 06

One of the most popular Rheonik Mass Flowmeters

The RHM 06 can measure flow rates up to 20 kg/min (44 lb/min) with temperatures in excess of 350°C and pressures up to 510 bar, manufactured by GE's Rheonik mass flowmeter experts.



Applications

- General control
- Dosing
- Mixing
- Batching
- Injections
- Filling

Features

- Suitable for pressure up to 510 bar
- Flow uncertainty down to 0.10%
- Repeatability better than 0.05%
- Unique torsion oscillator
- Typical measuring ranges from 0.25 to 20 kg/min
- Minimal flows as low as 0.15 kg/min
- Optimized solutions for batching operation
- Extra compact design with minimal space requirement
- Hazardous Area Approvals (ATEX, CSA, ...)
- Customization possible

Advantages

- Torsion oscillator design assures most stable and basically drift free measurement and increased signal to noise ratio
- Not sensitive to changes in pressure
- Longest life time and increased safety (low stress in welds and increased wall thickness against abrasion)
- No moving parts, practically no maintenance
- Removable connection manifold available



Reading Office

Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire. RG6 4UT. UK.
Tel: +44 (0)118 9311188
Email: info@able.co.uk

Aberdeen Office


Unit 6 Airside Business Park, Kirkhill Industrial Estate,
Dyce, Aberdeen. AB21 0GT. UK.
Tel: +44 (0)1224 725999
Email: ab@able.co.uk

Internet: www.able.co.uk
e-procurement: www.247able.com
Registered in England No: 01851002
VAT No: GB 417 2481 61




General Dimensions RHM 06

PMO/SMO (parallel/serial, manifold construction)

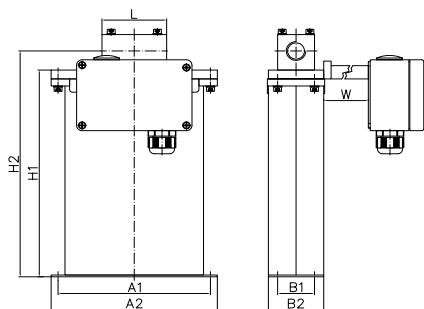

	Process Connection	Face to face length (L)		Order Code
		mm	in	
Standard	Female Thread G ½"	70	2.76	G1
	Female Thread ½" NPT	70	2.76	N1

Type removable manifold with PTFE seals and thread connection

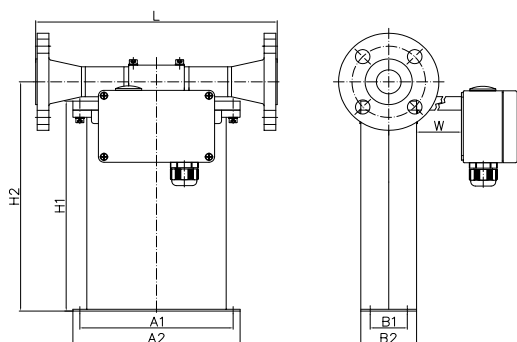

	Process Connection	Face to face length (L)		Order Code
		mm	in	
Standard	Flange DIN DN25/PN40	260	10.24	D1
	Flange DIN DN25/PN100	300	11.81	D2
	Flange ANSI 1" 150# RF/SF	260	10.24	A1
	Flange ANSI 1" 300# RF/SF	260	10.24	A2
	Flange ANSI 1" 600# RF/SF	300	11.81	A3
	Flange ANSI 1" 1500# RF/SF	350	13.78	A6
	Flange ANSI 1" 1500# RTJ	350	13.78	R1
Optional	Flange DIN DN25/PN16	260	10.24	D0
	Flange DIN DN25/PN160	300	11.81	D3
	Flange JIS RF 10k 25A (1")	260	10.24	J1
	Flange JIS RF 20k 25A (1")	260	10.24	J2

Type removable manifold with PTFE seals and flange connection

A1 = 165 mm (6.50 in)
 A2 = 180 mm (7.09 in)
 H1 = 234 mm (9.21 in)
 H2 = 255 mm (10.04 in)

B1 = 40 mm (1.57 in)
 B2 = 60 mm (2.36 in)

Terminal box (without cable gland) 125 x 80 x 58 mm (4.92 x 3.15 x 2.28 in)
 W = 0 mm for Temperature Range T1 and TA
 W = 150 mm (5.91 in) for Temperature Range T2

For weights and packaging dimensions please see last page of this section.

Reading Office

Cutbush Park, Danehill, Lower Earley,
 Reading, Berkshire. RG6 4UT. UK.
 Tel: +44 (0)118 9311188
 Email: info@able.co.uk

Aberdeen Office


Unit 6 Airside Business Park, Kirkhill Industrial Estate,
 Dyce, Aberdeen. AB21 0GT. UK.
 Tel: +44 (0)1224 725999
 Email: ab@able.co.uk

Internet: www.able.co.uk
 e-procurement: www.247able.com
 Registered in England No: 01851002
 VAT No: GB 417 2481 61



General Dimensions RHM 06


PFO (parallel, sealless construction with flange connection)

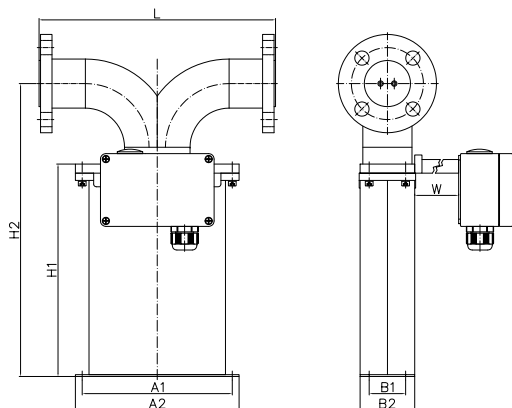

Type parallel, welded measuring loops without seals and flange connection

	Process Connection	Face to face length (L)		Order Code
		mm	in	
Standard	Flange DIN DN25/PN40	260	10.24	D1
	Flange DIN DN25/PN100	300	11.81	D2
	Flange ANSI 1" 150# RF/SF	260	10.24	A1
	Flange ANSI 1" 300# RF/SF	260	10.24	A2
	Flange ANSI 1" 600# RF/SF	300	11.81	A3
	Flange ANSI 1" 1500# RF/SF	300	11.81	A6
	Flange ANSI 1" 1500# RTJ	300	11.81	R1
	Flange ANSI 1" 2500# RF/SF	300	11.81	A8
	Flange ANSI 1" 2500# RTJ	300	11.81	R2
Optional	Flange DIN DN25/PN16	260	10.24	D0
	Flange DIN DN25/PN160	300	11.81	D3
	Grayloc Hub 1 GR 5 (1")	300	11.81	H1
	Flange JIS RF 10k 25A (1")	260	10.24	J1
	Flange JIS RF 20k 25A (1")	260	10.24	J2

PFT (parallel, sealless construction with thread connection)

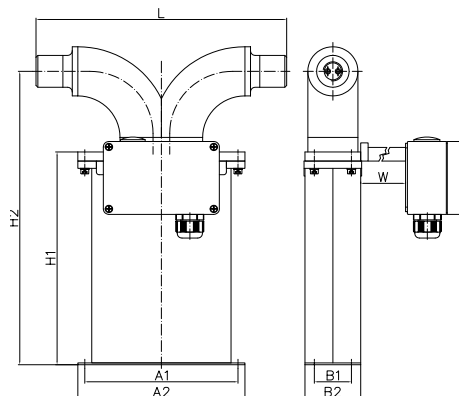

Type parallel, welded measuring loops without seals and thread connection

	Process Connection	Face to face length (L)		Order Code
		mm	in	
Standard	Female Thread G ½"	270	10.63	G1
	Female Thread ½" NPT	270	10.63	N1
	Swagelok ½" Tube inlet (SS-810-1-12W)	360	14.17	W1

A1 = 165 mm (6.50 in)
 A2 = 180 mm (7.09 in)
 H1 = 234 mm (9.21 in)
 H2 = 322 mm (12.68 in)

B1 = 40 mm (1.57 in)
 B2 = 60 mm (2.36 in)

Terminal box (without cable gland) 125 x 80 x 58 mm (4.92 x 3.15 x 2.28 in)
 W = 0 mm for Temperature Range T1 and TA
 W = 150 mm (5.91 in) for Temperature Range T2, T3 and T4

For weights and packaging dimensions please see last page of this section.

Reading Office

Cutbush Park, Danehill, Lower Earley,
 Reading, Berkshire. RG6 4UT. UK.
 Tel: +44 (0)118 9311188
 Email: info@able.co.uk

Aberdeen Office


Unit 6 Airside Business Park, Kirkhill Industrial Estate,
 Dyce, Aberdeen. AB21 0GT. UK.
 Tel: +44 (0)1224 725999
 Email: ab@able.co.uk

Internet: www.able.co.uk
 e-procurement: www.247able.com
 Registered in England No: 01851002
 VAT No: GB 417 2481 61




General Dimensions RHM 06

SF0 (serial, sealless construction without dead spaces) (*)

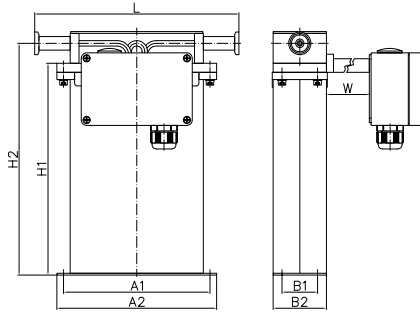

Type single path, welded measuring loops without seals and sanitary connection
H2 = 255 mm (10.04 in)

	Process Connection	Face to face length (L)		Order Code
		mm	in	
Standard	Sanitary ½" Triclamp, DIN 32676	230	9.06	S1
Optional	Sanitary NW10, DIN 11851	230	9.06	S2

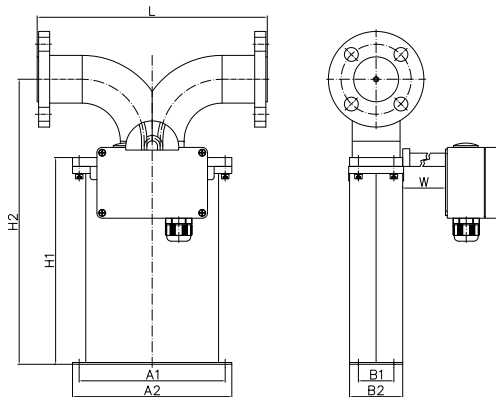

Type single path, welded measuring loops without seals and flange connection
H2 = 322 mm (12.68 in)

	Process Connection	Face to face length (L)		Order Code
		mm	in	
Standard	Flange DIN DN25/PN40	260	10.24	D1
	Flange ANSI 1" 150# RF/SF	260	10.24	A1
	Flange ANSI 1" 300# RF/SF	260	10.24	A2
Optional	Flange DIN DN25/PN16	260	10.24	D0

A1 = 165 mm (6.50 in)
A2 = 180 mm (7.09 in)
H1 = 234 mm (9.21 in)

B1 = 40 mm (1.57 in)
B2 = 60 mm (2.36 in)

Terminal box (without cable gland) 125 x 80 x 58 mm (4.92 x 3.15 x 2.28 in)
W = 0 mm for Temperature Range T1 and TA
W = 150 mm (5.91 in) for Temperature Range T2, T3 and T4

(*) SF0 construction contains brazed joints (brazing material B-Ni82CrSiBFe-970/1000) which are not as corrosion resistant as the piping material 1.4571 (316Ti).

Weight in standard manifold construction with female threads: approx. 5 kg (11 lb)

Weight in standard sealless construction and 150# flanges: approx. 8 kg (18 lb)

Shipping in carton box approx. 50 x 50 x 50 cm (19.7 x 19.7 x 19.7 in), gross weight with sealless construction, 150# standard flanges and RHE 08 transmitter approx. 15 kg (33 lb)

Finish type of our ANSI flanges corresponds to SF (AARH 125 up to 250 µm, Ra 3.2 up to 6.3 µm)
For customization with regard to face to face length and special fittings, please consult your local agent

Please note that larger diameter process connections are always possible

Reading Office

Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire. RG6 4UT. UK.
Tel: +44 (0)118 9311188
Email: info@able.co.uk

Aberdeen Office

Unit 6 Airside Business Park, Kirkhill Industrial Estate,
Dyce, Aberdeen. AB21 0GT. UK.
Tel: +44 (0)1224 725999
Email: ab@able.co.uk

Internet: www.able.co.uk
e-procurement: www.247able.com
Registered in England No: 01851002
VAT No: GB 417 2481 61



Pressure Rating RHM 06

The maximum pressure (pmax) of a flow sensor is determined by its weakest part. The weakest part can be the measuring loops (pmax indicated below) or the construction type (pmax indicated in the Basic Order Code section, last page) or the selected flanges/fittings (for pmax please see respective standard).

pmax of P1 measuring loops, low DP version M1 standard material - 1.4571 (316Ti) OD x WT 6 x 0.5 mm (0.236 x 0.020 in)

bar	°C	psi	°F
202	50	2930	122
181	120	2625	248
156	210	2263	410
131	350	1900	662

pmax of P2 measuring loops M3 optional material - 2.4602 (Alloy C22) OD x WT 6 x 1 mm (0.236 x 0.039 in)

bar	°C	psi	°F
590	50	8557	122
524	120	7600	248
414	210	6005	410
358	350	5192	662

pmax of P2 measuring loops, standard M1 standard material - 1.4571 (316Ti) OD x WT 6 x 1 mm (0.236 x 0.039 in)

bar	°C	psi	°F
437	50	6338	122
380	120	5511	248
300	210	4351	410
260	350	3771	662

Performance RHM 06

Max Flow Rate Q_{max} and Q_{nom} (*) = 20 kg/min (44 lb/min)




Standard Models		
Flow Rate		Uncertainty
kg/min	lb/min	in % of reading
20	44	0.20
10	22	0.20
5.0	11	0.20
1.0	2.2	0.20
0.5	1.1	0.50

Goldline Models (**) - selected sensors		
Flow Rate		Uncertainty
kg/min	lb/min	in % of reading
20	44	0.10
10	22	0.10
5.0	11	0.10
2.0	4.4	0.10
1.0	2.2	0.12

Low Flow Models (**) - selected sensors		
Flow Rate		Uncertainty
kg/min	lb/min	in % of reading
10	22	0.20
5.0	11	0.20
2.0	4.4	0.20
0.5	1.1	0.20
0.3	0.7	0.60

Repeatability
Better $\pm 0.1\%$ of rate,
Goldline 0.05%

Temperature
Better $\pm 1^\circ\text{C}$

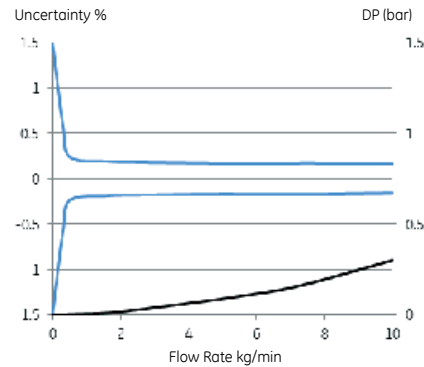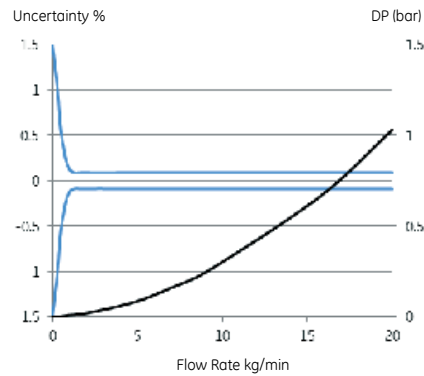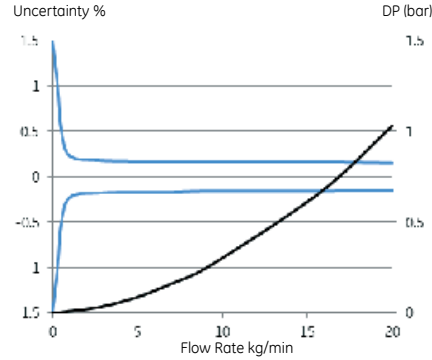

(*) Nominal flow Q_{nom} refers to roughly 8 - 10 m/s (26 - 33 ft/s) velocity in measuring loops for best performance.

(**) Selected sensors are only available in combination with temperature ranges T1, TA, standard material and pressure range.

- Serial/single path versions offer the same accuracy at half the flow (Q_{max} serial version = 10 kg/min).
- No relevant pressure effect due to torsional oscillation, semi-circle (non-deforming) measurement section.

- Uncertainty of reading (incl. zero drift) indications refer to reference conditions H_2O , 18-24°C (66 - 76°F), 1 - 3 bar (15 - 45 psi) and installation according to field manual.
- Pressure drop indications refer to H_2O , with parallel measuring loops type P1 and standard manifold block connections.
- For calibration to customer range and / or with improved uncertainty, please consult factory.

Reading Office

Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire. RG6 4UT. UK.
Tel: +44 (0)118 9311188
Email: info@able.co.uk

Aberdeen Office

Unit 6 Airside Business Park, Kirkhill Industrial Estate,
Dyce, Aberdeen. AB21 0GT. UK.
Tel: +44 (0)1224 725999
Email: ab@able.co.uk

Internet: www.able.co.uk
e-procurement: www.247able.com
Registered in England No: 01851002
VAT No: GB 417 2481 61

